




## SC 30 / 400



**Input Voltage 1Ph 230 Volt  
Battery 12 - 24 Volt, 5 > 400  
Ah**

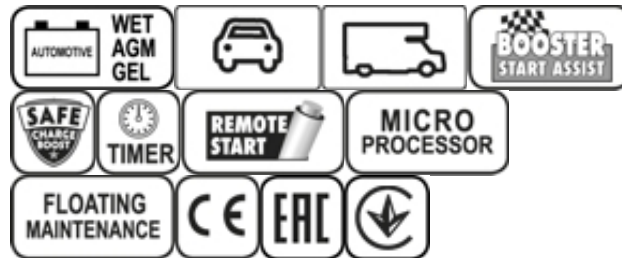

### Features

- Input Voltage (Volt 50-60Hz AC):** 1 Ph x 230
- Power (KW):** 0,7 - 7,8
- Nominal battery voltage (Volt):** 12 - 24
- Voltage limitation (Volt):** 14,8 (12V) - 29,6 (24V)
- Average charging current (Amp):** 20
- Effective charging current (Amp.MAX):** 30
- Charging positions (N°):** STEPLESS
- Boosting Current (Amp 0 Volt cc):** 400
- Boosting current (Amp 1 Volt / EL):** 230
- Battery types:** Pb: WET MF, AGM, Ca-Ca.
- Battery capacity (Ah min/max):** 5 - 400
- Dimension, Wid.-Dep.-Height (mm):** 390 x 280 x 903
- Weight Kg:** 20.6
- LOGISTIC INFO CODE:** 330100
- Barcode:** 8011399029239

**Package dimension,  
Wid.-Dep.-Height 310 x 610 x 300  
(mm):**  
**Package weight kg:** 20.6  
**Pieces for pallet:** 20  
**HS code:** 85044055

© DECA s.p.a. Str. dei Censiti, 10 Falciano - Rovereta 47891 Repubblica di San Marino - Tel. 0549 910.711 - Fax 0549 908.360 - [deca@decaweld.com](mailto:deca@decaweld.com)

powered by **READY**