

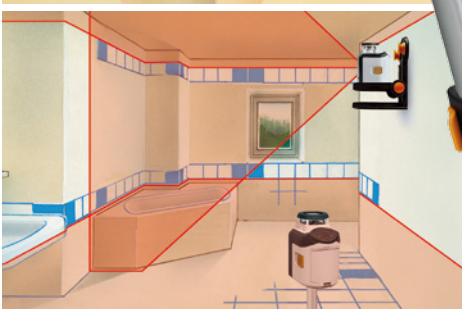


Laserliner®

SmartLine-Laser 360° set

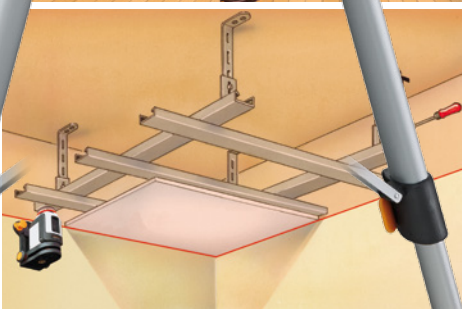

Crossline-Laser Set with crank tripod, horizontal 360° laser circle, vertical line and slope function

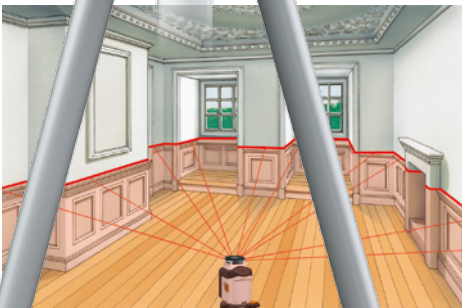

SmartLine-Laser 360°

- **Automatic Level:** automatic alignment by virtue of a magnetic pendulum system.
- The **horizontal laser line** produces a continuous 360° laser line, the **vertical laser line** is oriented at right angles thereto. Ideal for almost any alignment job.
- **RX-Ready:** The integrated hand receiver mode detects the laser lines with the optional laser receiver RX up to a max. of 30 m radius – ideal for all interior and exterior applications.
- **Individually switchable** laser lines
- **Out-Of-Level:** is indicated by optical signals when the unit is outside its self-levelling range
- **Additional slope mode** to align angled surfaces.
- **Transport lock:** a pendulum lock protects unit during transport.
- **Simple, uniform operating techniques.**

Compact Tripod 150 cm


- Crank tripod of aluminium
- 5/8" thread adapter

TECHNICAL DATA

ACCURACY ± 0,4 mm / m
SELF-LEVELLING RANGE ± 5°
LEVELLING automatic
OPERATING RANGE (depending on room illumination) 20 m
OPERATING RANGE with hand receiver (depends on how the technology affects the difference in brightness) 10 - 30 m
LASER WAVELENGTH 635 nm
LASER CLASS 2 / < 1 mW
POWER SUPPLY 4 x 1.5V alkaline batteries (type AA, LR6)
OPERATING TIME approx. 35 hours
OPERATING TEMPERATURE 0°C ... +40°C
STORAGE TEMPERATURE -10°C ... +70°C
WEIGHT (complete set) 3,4 kg
DIMENSIONS SLL 360° (W x H x D) 80 x 125 x 100 mm




Rev.0215

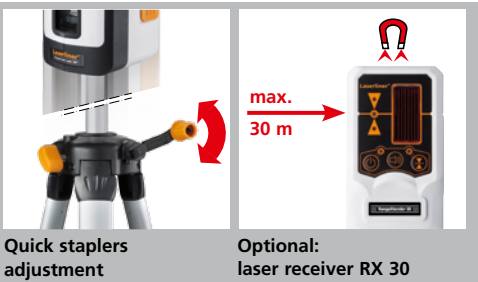

Quick staplers adjustment

Optional: laser receiver RX 30

1H 1V



BONUS

SmartLine-Laser 360° set

- inclusive SmartLine-Laser 360°
- + softbag
- + laser enhancement glasses
- + batteries

- inclusive compact tripod 150 cm
- + softbag

Packing dimension (W x H x D) 185 x 895 x 175 mm

ARTICLE	ARTICLE NO	EAN-CODE	PU
SmartLine-Laser 360° set	081.118B	4 021563 686995	2

